



Stainless Steel Y Type Strainers , 800 psi , Screwed End

Fig No: YS-800 1/4"~ 3"
DN8 ~ DN80



Features :

Investment Cast Components
Screwed Bonnet
For Food , General Chemical and Industrial Application

Standard Compliance :



ASTM ASME B16.34 API 598 EN 10213 EN 12516 EN 12266
ANSI B1.20.1(NPT) ISO 228-1 DIN 2999 BS 21(BSPP)
BS 21(BSPT) ISO 7-1

Specifications:

End Connection : Threaded End
Working Pressure : 800 psi / 40 Bar (CWP)
Temperature Range : - 4 to 356° F / - 20 to 180°c
Pressure Test According to API 598 or EN 12266

MATERIAL LIST

NO	PART NAME	MATERIAL	Q,TY
1	BODY	ASTM A351 GR.CF8M	1
2	BLOW OFF PLUG	ASTM A351 GR.CF8M	1
4	SCREEN	ASTM A276 GR.316	1
9	BONNET	ASTM A351 GR.CF8M	1
11	BODY SEAL	PTFE.	1
31	O-RING	VITON	1

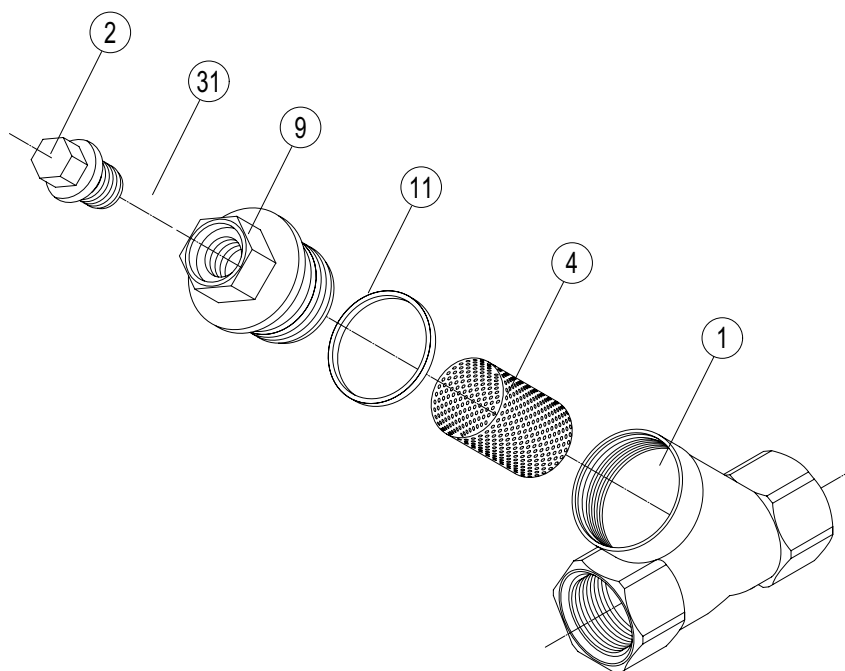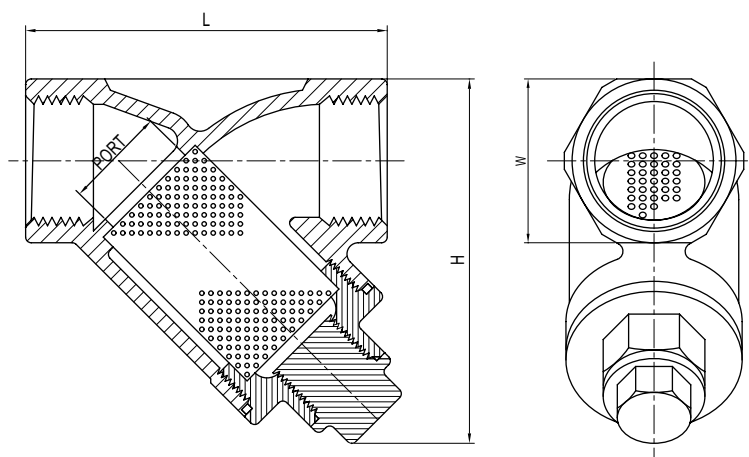

DIMENSIONS

unit:mm

SIZE	PORT	L	H	W
1/4"	10.0	65.0	48.0	24.0
3/8"	12.0	65.0	48.0	24.0
1/2"	15.0	65.0	48.0	26.0
3/4"	20.0	80.0	55.0	33.0
1"	25.0	90.0	70.0	41.0
1-1/4"	32.0	105.0	74.0	50.5
1-1/2"	40.0	120.0	82.0	57.0
2"	50.0	140.0	95.0	69.0
2-1/2"	65.0	170.0	120.0	87.0
3"	80.0	200.0	140.0	102.0